


Bifacial Half-Cut Glass to Glass PV Modules Bifacial Dual Glass



PIX MBHG 120
570-600 Wp

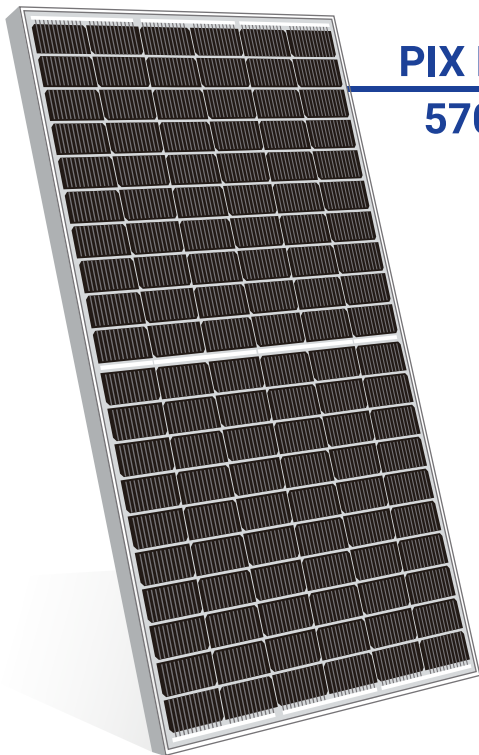

Power Tolerance
+4.99Wp



Efficiency Upto
20.99 %



Module Warranty
12 Years



Output Warranty
30 Years

KEY FEATURES



PID Resistance with long term reliability.



Better Performance even at low irradiation.



Maximum System Voltage:
1500 V DC.



Increased string length & **low BOS Cost.**



Withstand upto **5400 Pa of snow load.**



Withstand upto **2400 Pa of wind load.**



Rigorous Testing Criteria
100% EL Inspection ensuring defect-free modules.

ABOUT PIXON

PIXON is a venture of the Marwadi group. It is equipped with the state-of-the-art technology and turnkey machinery of 1 GW line capacity for solar modules and houses clean room environment facility to 1GW manufacturing line for EVA films. As the world adheres to solar energy revolution, PIXON envisions to globally provide efficient solar energy products and solutions. Thus, enhance and contribute to Global Climate Sustainability.

CERTIFICATIONS

Product certifications are under process

IDEAL FOR: Utility Projects, Commercial & Industrial Projects, Residential Projects, Institutional Projects, Off-grid Projects

PIXON GREEN ENERGY PRIVATE LIMITED

Manufacturing Unit: R.S. No.: 157/1, 158/1, 158/2, 165/1, 166 of Khijadiya Nana, R.S. No.: 15/1, Rajkot – Jamnagar Highway, Paddhari, Rajkot – 360110

1800 108 8800 | sales@pixonenergy.com

*Due to continuous product updation, specifications may change without notice.



**Solar is
the new Green!**

PIX MBHG 120 600

M12

600W

20.99%

+4.99Wp

≤2.0%

Mono Crystalline Perc PV Modules


12 BB HALF-CUT CELL
MODULE

MAXIMUM
POWER OUTPUT

MAXIMUM
EFFICIENCY

POWER
TOLERANCE

FIRST YEAR
POWER DEGRADATION

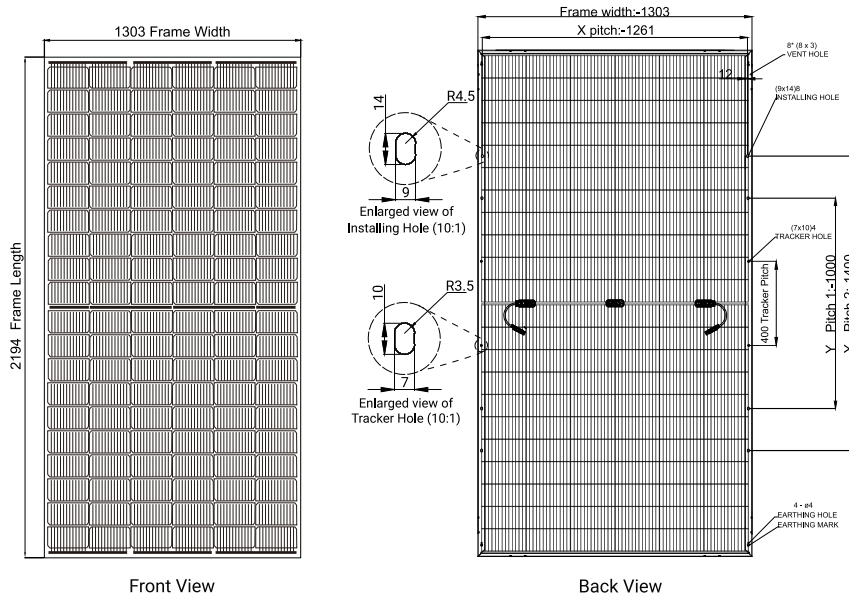

Front View

Back View

*All Dimensions are in mm.

*Cable Length may vary based on Requirements.

MECHANICAL DATA

Cells Specifications (Number, Size)	120 Cells , 210 mm X 105 mm
Module Dimensions	2194 mm X 1303 mm X 35 mm
Weight	29 kg
Glass	High Transmission Low Iron Tempered Dual Glass, AR coated, 2 mm (T)
Embedding	Low Shrinkage PID Resistance EVA, UV Resistant
Junction Box	IP 68 Rated
Number of Diodes	3 Bypass Diodes
Cables & Connectors	Cable Length 400mm, 4mm ² , MC4 Connectors / MC4 Compatible
Frame	Anodized Aluminum Alloy Silver Profile (Black Frame Available on Request)

MECHANICAL LOAD TEST PARAMETERS

Front Side Maximum Static Load	5400Pa
Rear Side Maximum Static Load	2400Pa

TEMPERATURE RATING

NOCT (Nominal Operating Cell Temperature)	45°C (±2°C)
Temperature Coefficient of Current (Isc)	0.04% / °C
Temperature Coefficient of Voltage (Voc)	-0.24% / °C
Temperature Coefficient of Power (Pmax)	-0.31% / °C

OPERATING PARAMETERS

Operational Temperature	-40°C ~ +85°C
Maximum System Voltage	1500V DC
Maximum Series Fuse Rating	30A

ELECTRICAL PARAMETERS AT STC (25°C) & NMOT (20°C) (AM 1.5g, 1000 W/m², 1m/s) According to EN 60904-3

Test Conditions		STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Peak Power	Pmax [Wp]	570	429.66	575	433.22	580	437.33	585	441.20	590	444.82	595	448.72	600	452.36
Module Efficiency	η [%]	19.94	-	20.10	-	20.29	-	20.47	-	20.64	-	20.82	-	20.99	-
Open-Circuit Voltage	Voc [V]	40.91	38.86	40.95	38.90	41.05	39	41.25	39.19	41.45	39.38	41.65	39.57	41.85	39.76
Short-Circuit Current	Isc [A]	18	14.52	18.07	14.57	18.13	14.62	18.18	14.66	18.22	14.70	18.27	14.74	18.31	14.77
Max Rated Voltage	Vmp [V]	33.55	31.87	33.65	31.97	33.85	32.16	34.05	32.35	34.25	32.54	34.45	32.73	34.65	32.92
Max Rated Current	Imp [A]	16.99	13.48	17.08	13.55	17.14	13.60	17.19	13.64	17.23	13.67	17.28	13.71	17.32	13.74

BIFACIAL OUTPUT-REAR SIDE POWER GAIN

	Peak Power (STC)	570	575	580	585	590	595	600
10%	Maximum Power (Pmax)	627	633	638	644	649	655	660
	Module Efficiency (%)	21.93%	22.12%	22.32%	22.51%	22.70%	22.89%	23.09%
20%	Maximum Power (Pmax)	684	690	696	702	708	714	720
	Module Efficiency (%)	23.93%	24.14%	24.35%	24.56%	24.77%	24.98%	25.19%
30%	Maximum Power (Pmax)	741	748	754	761	767	774	780
	Module Efficiency (%)	25.92%	26.15%	26.37%	26.60%	26.83%	27.06%	27.28%


*Power gain from rear side depends upon the ground Reflectance & Bifaciality factor.

PACKAGING CONFIGURATION

Modules per Box	31 Pieces
Modules per 40' Container	620 Pieces

WARRANTY

Product Warranty	12 Years
Performance Warranty	30 Years Linear Power Warranty 0.55% Annual Degradation Over 30 Years

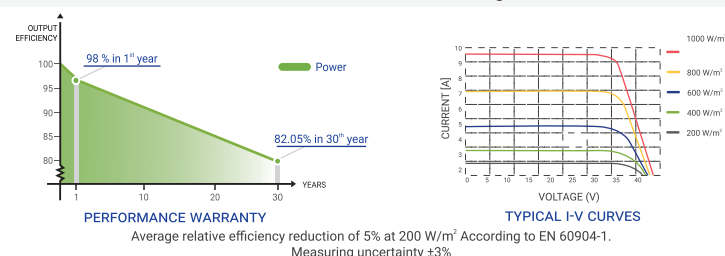

**Solar is
the new Green!**