


# Mono PERC Half-cut Glass to Black Backsheet PV Modules



**PIX MPHB 120**  
**340 - 370 Wp**

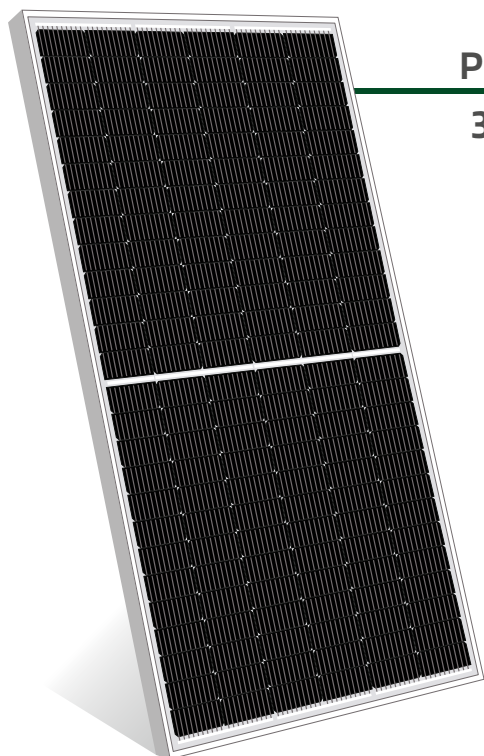

Power Tolerance  
**+4.99Wp**



Efficiency Upto  
**20.33 %**



Module Warranty  
**12 Years**



Output Warranty  
**27 Years**

## KEY FEATURES



**PID Resistance** with long term reliability.



**Better Performance** even at low irradiation.



Maximum System Voltage: **1500 V DC**.



Increased string length & **low BOS Cost**.



Withstand upto **5400 Pa** of snow load.



Withstand upto **2400 Pa** of wind load.



**Rigorous Testing Criteria**  
100% EL Inspection ensuring defect-free modules.

**IDEAL FOR:** Utility Projects, Commercial & Industrial Projects, Residential Projects, Institutional Projects, Off-grid Projects

### PIXON GREEN ENERGY PRIVATE LIMITED

**Manufacturing Unit:** R.S. No.: 157/1, 158/1, 158/2, 165/1, 166 of Khijadiya Nana, R.S. No.: 15/1, Rajkot - Jamnagar Highway, Paddhari, Rajkot - 360110

1800 108 8800 | sales@pixonenergy.com

## ABOUT PIXON

PIXON is a venture of the Marwadi group. It is equipped with the state-of-the-art technology and turnkey machinery of 1GW line capacity for solar modules and houses clean room environment facility to 1GW manufacturing line for EVA films. As the world adheres to solar energy revolution, PIXON envisions to globally provide efficient solar energy products and solutions. Thus, enhance and contribute to Global Climate Sustainability.

## CERTIFICATIONS

ALMM



ALMM APPROVED

IEC (International Electrotechnical Commission)

- IEC 61215-1:2021
- IEC 61215-2:2021
- IEC 61730-1:2016
- IEC 61730-2:2016
- IEC TS 61701 Ed.3 :2020 Severity-6
- IEC TS 62804-1:2015
- IEC 61853-1:2011
- IEC 61853-2:2016
- IEC 62716:2013
- IEC 60068-2-68:1994-08
- IEC TS 63342:2022

BIS: Bureau of Indian Standards

- IS 14286:2010
- IS 61730-1:2004
- IS 61730-2:2004

US Certification

- UL 61730-1:2022
- UL 61730-2:2022

ISO Certification

- ISO 9001:2015
- ISO 14001:2015
- ISO 45001:2018(OHSAS)

CE Mark Testing & Certification

CLASS II

\*Due to continuous product updation, specifications may change without notice.



**Solar is  
the new Green!**

PIX MPHb 120 370

M6

370W

20.33%

+4.99Wp

≤2.0%

Mono Crystalline Perc PV Modules


9 BB HALF-CUT CELL  
MODULE

MAXIMUM  
POWER OUTPUT

MAXIMUM  
EFFICIENCY

POWER  
TOLERANCE

FIRST YEAR  
POWER DEGRADATION

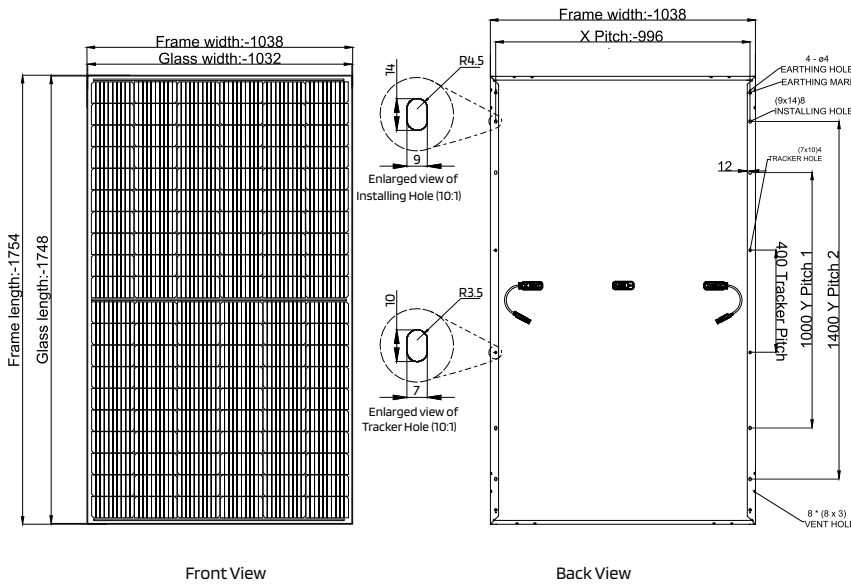

MECHANICAL DATA

Cells Specifications (Number, Size)	120 Cells, 166 mm X 83 mm
Module Dimensions	1754 mm X 1038 mm X 35 mm
Weight	23kg
Glass	High Transmission Low Iron Tempered Glass, AR coated, 3.2 mm (T)
Embedding	Low shrinkage PID Resistance EVA, UV Resistant
Backsheet	PVDF / Tedlar (Transparent)
Junction Box	IP 68 Rated, Split JB with bypass diode
Number of Diodes	3 Bypass Diodes
Cables & Connectors	Cable Length 400mm, 4mm <sup>2</sup> , MC4 Connectors / MC4 Compatible
Frame	Anodized Aluminum Alloy Silver Profile (Black Frame Available on Request)

MECHANICAL LOAD TEST PARAMETERS

Front Side Maximum Static Load	5400Pa
Rear Side Maximum Static Load	2400Pa

\*All Dimensions are in mm.  
\*Cable Length may vary based on Requirements.

TEMPERATURE RATING

NOCT (Nominal Operating Cell Temperature)	45°C (±2°C)
Temperature Coefficient of Current (Isc)	0.04% / °C
Temperature Coefficient of Voltage (Voc)	-0.24% / °C
Temperature Coefficient of Power (Pmax)	-0.31% / °C

OPERATING PARAMETERS

Operational Temperature	-40°C ~ +85°C
Maximum System Voltage	1500V DC
Maximum Series Fuse Rating	30A

ELECTRICAL PARAMETERS AT STC (AM 1.5g, 1000 W/m<sup>2</sup>, 1m/s, 25°C) According to EN 60904-3

	Pmax [Wp]	340	345	350	355	360	365	370
Peak Power								
Module Efficiency	η [%]	18.68	18.95	19.23	19.50	19.77	20.05	20.33
Open-Circuit Voltage	Voc [V]	40.7	40.8	40.9	41	41.1	41.2	41.3
Short-Circuit Current	Isc [A]	10.89	11.03	11.12	11.25	11.37	11.48	11.67
Max Rated Voltage	Vmp [V]	34.52	34.68	34.8	34.95	35.02	35.13	35.22
Max Rated Current	Imp [A]	9.86	9.95	10.06	10.17	10.28	10.39	10.51

ELECTRICAL PARAMETERS AT NMOT (AM 1.5g, 800 W/m<sup>2</sup>, 20°C) According to EN 60904-3

	Pmax [Wp]	346.736	350.510	354.373	358.172	361.984	365.648	369.482
Peak Power								
Open-Circuit Voltage	Voc [V]	38.67	38.76	38.86	38.95	39.05	39.14	39.24
Short-Circuit Current	Isc [A]	8.78	8.90	8.97	9.07	9.17	9.26	9.41
Rated Voltage	Vmp [V]	32.79	32.95	33.06	33.20	33.27	33.37	33.46
Rated Current	Imp [A]	7.82	7.89	7.98	8.07	8.16	8.24	8.35


PACKAGING CONFIGURATION

Modules per Box	31 Pieces
Modules per 40' Container	620 Pieces

WARRANTY

Product Warranty	12 Years
Performance Warranty	27 Years Linear Power Warranty 0.55% Annual Degradation Over 27 Years

CERTIFICATIONS



Solar is  
the new Green!